

**Gear motors for sliding gates – Residential & Commercial**



**C720**  
**400 Kg**




**C721**  
**800 Kg**

- Integrated E721 control board**
- Intelligent easy to use features
  - Bright display and easy to see LED's
  - Master & slave function
  - Current sensing virtual encoder

**FEATURES**

- Direct drive with high mechanical performance – more than 80%.
- Brushless Motor for long life.
- Easy lockable manual release.
- Adjustable open and closing speeds up to 300mm/sec.
- Reliable magnetic limits.
- Smooth and quiet operation.
- One press set up – self-learning.
- Master and slave function.
- Advanced logistics with adjustable output.
- Pedestrian function from transmitter.

Technical	C720	C721
Power Supply	230Vac 50Hz	
Motor supply	24VDC	
Power	170W	290W
Current	7A	12A
Max Torque	18Nm	30Nm
Trust	320N	530N
Pinion	Z28	
Max gate speed	300mm/s	
Limited switches	Magnetic	

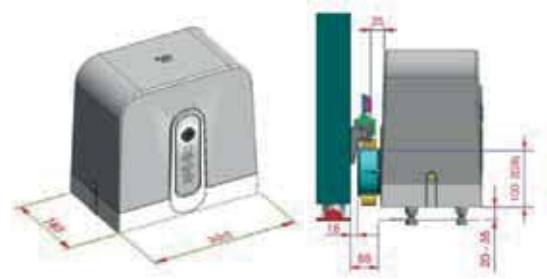

- Plug-In 2 Channel Receiver**
- 433MHz & 868MHz
  - Complete with antenna
  - Compatible with all FAAC transmitters



**Black SLH Transmitter**

**POPULAR ACCESSORIES**



Self regulating 24V back up battery.



24V UPS Backup for power outages from 2 days to 2 weeks.



Safety Beams



External Transformer



Backlit Keypad



Bluetooth Access Controller



90mm frame insert gate wheel.



Add on receiver.



3G GSM Module



Rack



Bolt down gate stop including rubber.



90 degree 5mm bracket for rollers to support sliding gate.



40mm rollers: Available in 60, 100 & 150mm.



Ground Track